



The ideal lighting solution for:

- Security lighting
- Accent and perimeter lighting
- Garages
- Entranceways
- Transport platforms / waiting areas








Features

- Eco Earth-friendly design contains no mercury or lead.
- Indoor/outdoor use (-22° F to 114° F)
- Wet location / IP66 rating
- Highest-efficiency HX-POWR[™] Driver Best In Class 120-277V or 277-480V
- CTC[™] (Custom Thermal Conductivity) die-cast aluminum housing
- Corrosion resistant powder-coat finish
- Anti-glare Diamond Crystal[™] Lens
- Exceptional light quality >80% CRI
- Outdoor color tone
- Extreme performance 50,000+ user hours



CTC[™] (Custom Thermal Conductivity) die-cast aluminum housing

Optional PC photocell

EcoHX[™] LED's

Diamond Crystal[™] anti-glare lens

ncy **HX-POWR™ Driver**

Wattage	Voltage	Replace HID	Product Code	Color Tone	Photocell	Weight
30W	120-277	MH50 / MH175	CXVWP30	Outdoor	Included	3 lbs.
50W	120-277	MH175 / MH250	CXFWP50	Outdoor	PC/PC2	4 lbs.
100W	120-277	MH250 / MH400	CXFWP100	Outdoor	PC/PC2	7 lbs.
50W	120-277	MH175 / MH250	CXCWP50	Outdoor	PC/PC2	5 lbs.
70W	120-277	MH250 / MH400	CXCWP70	Outdoor	PC/PC2	7 lbs.
120W	120-277	MH400 / MH400+	CXCWP120	Outdoor	PC/PC2	9 lbs.










© 2022 HX Lighting, Inc. - 17 West Main Street - PO Box 149 – Dallastown, PA 17313 – 717-246-9500 – www.HXLightinginc.com

Photometrics / Dimensions

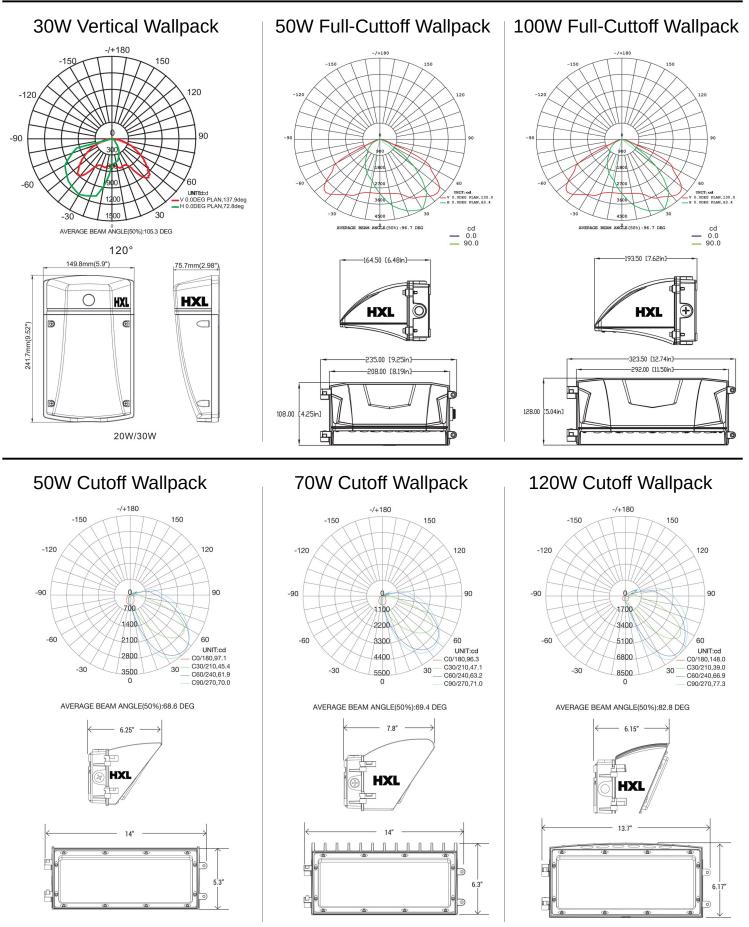

© 2022 HX Lighting, Inc. - 17 West Main Street - PO Box 149 – Dallastown, PA 17313 – 717-246-9500 – www.HXLightinginc.com