





HXL 05.13 X5 LED Tube Replacement – Read before starting installation!



WARNING! - Consult an electrician if you are unsure of any of the following instructions.
 Risk of fire – Supply wires must be rated 90°C or greater.
 Risk of death – Disconnect power at fuse or breaker panel before attempting any electrical work.

Installation:

- Verify that there is no power on the circuit
- Remove old tubes and disassemble fixture.
- Disconnect ballast from line inputs and sockets.
- Remove tube sockets and ballast.
- Connect incoming AC wires to input side of **Luminaire Disconnect**
- Remove nibs from sockets if required
- Connect neutral wire from **Luminaire Disconnect** to **GREEN** sockets and install sockets.
- Connect line wire from **Luminaire Disconnect** to **RED** sockets and install sockets.
- Ensure ground connection (green or bare wire) is secured to fixture.
- Reassemble fixture.
- Affix **LED Conversion Notice Sticker(s)**¹ on the deflector as indicated below.
- Install compatible LED tubes².
- Restore power and test.

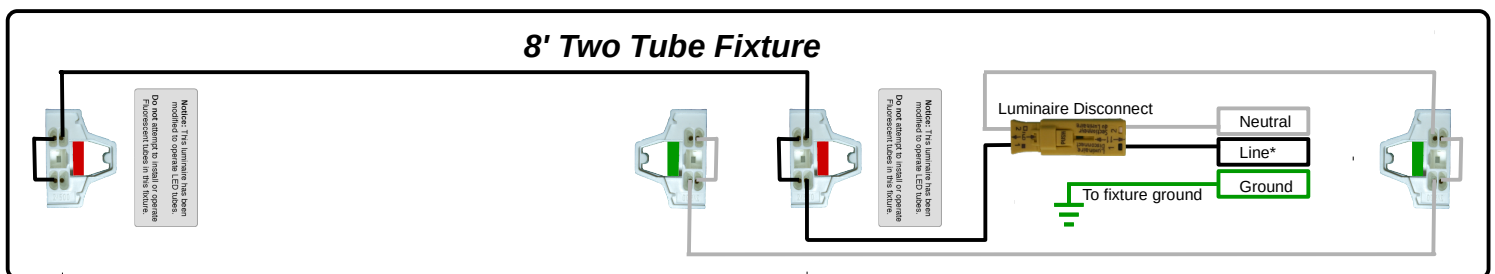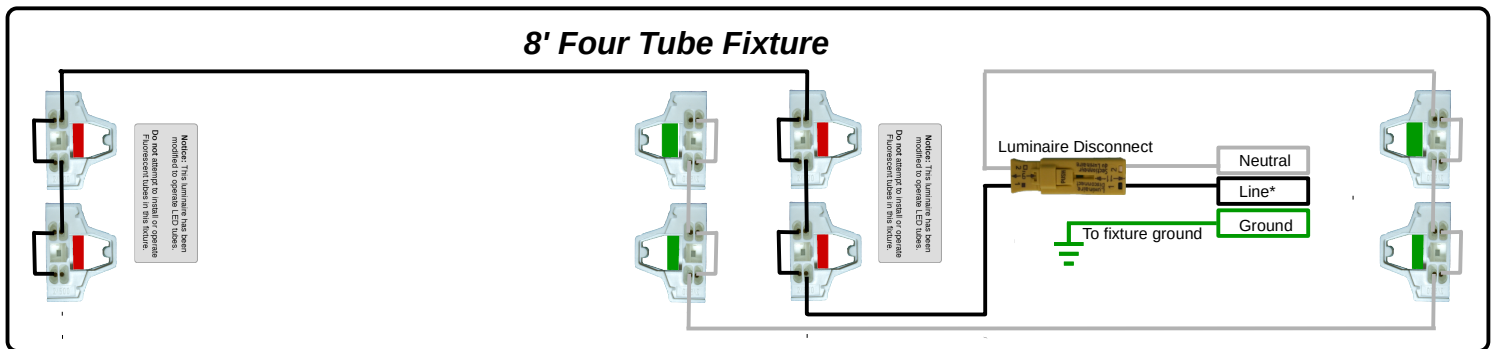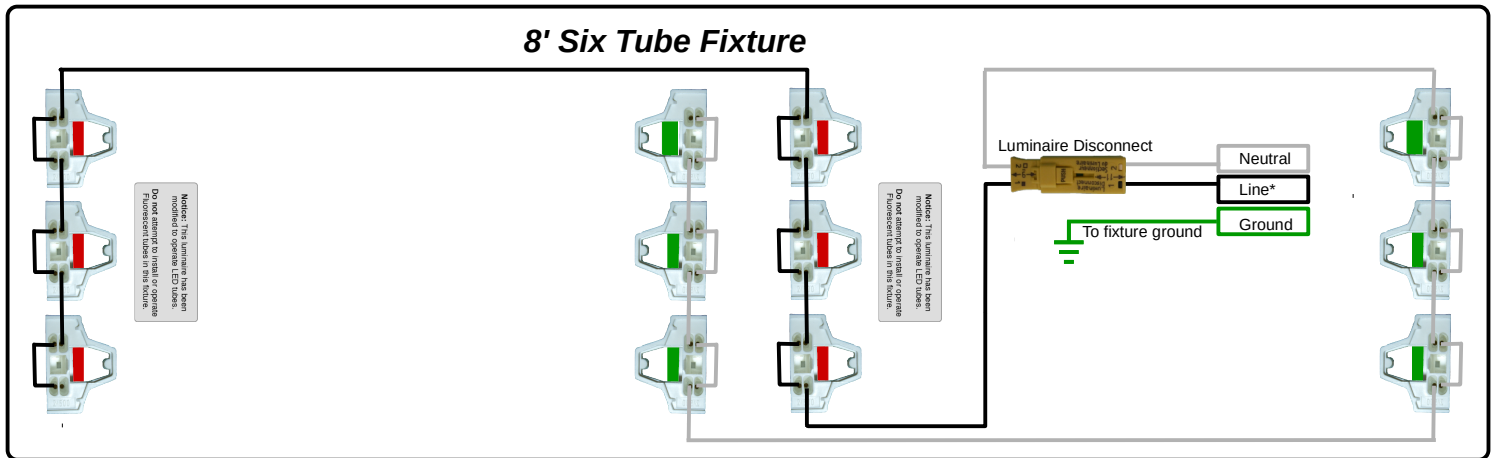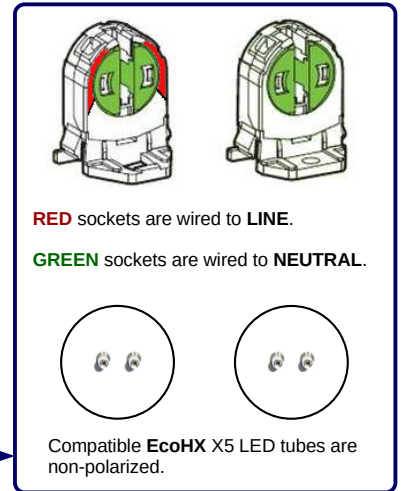

* **EcoHX LED Tubes** can be used with input voltages ranging from 120 to 277 VAC.

¹ The supplied **LED Conversion Notice Stickers** must be applied to the fixture reflectors as indicated in the diagrams.
² Compatible tubes include **EcoHX LX** series Type B T5 double-end tubes. **EcoHX** Type B double-end tubes are **UL Certified** and feature all glass construction to eliminate sagging and discoloration due to age.