

# HXL<sup>TM</sup> LIGHTING

## Covert-X<sup>TM</sup> Small/Medium Floodlights



The ideal lighting solution for:

- Security lighting
- Accent and perimeter lighting
- Signage/flag illumination
- Entranceways
- Transport platforms / waiting areas



CXBSL40




CXSFL30



CXMFL50/70

## Features

- **Eco** – Earth-friendly design contains no mercury or lead.
- Indoor/outdoor use (-22° F to 114° F)
- Wet location / IP66 rating
- Highest-efficiency **HX-POWR<sup>TM</sup> Driver** – Best In Class – 120-277V
- **CTC<sup>TM</sup>** (Custom Thermal Conductivity) die-cast aluminum housing
- Corrosion resistant powder-coat finish
- Anti-glare **Diamond Crystal<sup>TM</sup> Lens**
- Exceptional light quality - >80% CRI
- Outdoor color tone
- Extreme performance – 50,000+ user hours

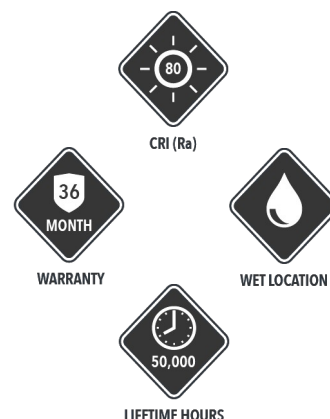



Wattage	Voltage	Replace HID	Product Code	Color Tone	Photocell	Weight
40W	120-277	MH150 / Q300	<b>CXBSL40</b>	Outdoor	n/a	3 lbs.
30W	120-277	MH150 / Q300	<b>CXSFL30</b>	Outdoor	n/a	3 lbs.
50W	120-277	MH175 / Q500	<b>CXMFL50</b>	Outdoor	PC/PC2	6 lbs.
70W	120-277	MH250 / Q1000	<b>CXMFL70</b>	Outdoor	PC/PC2	6 lbs.

Product Code	Description
<b>CXFL-U</b>	U-Bracket





# Photometrics / Dimensions



## CXBSL40

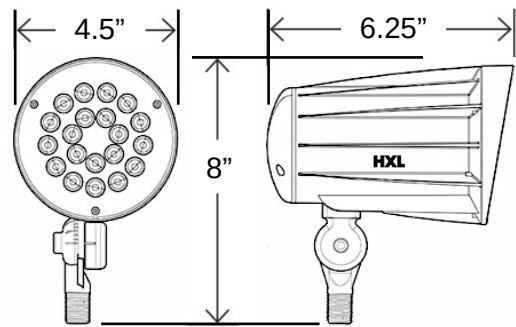

## CXSFL30

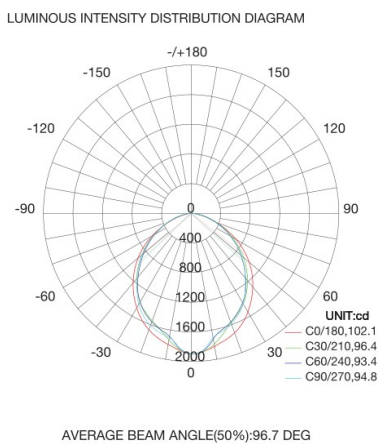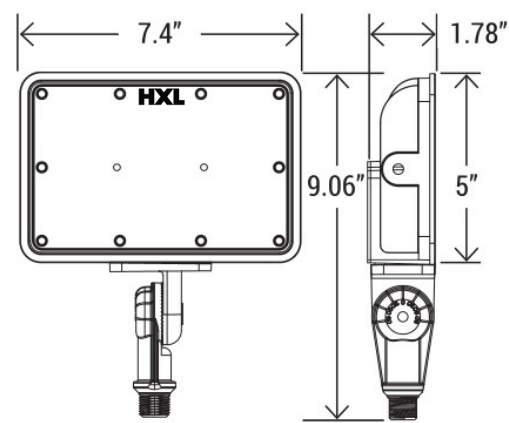

## CXMFL50 (Shown with Optional U-bracket)

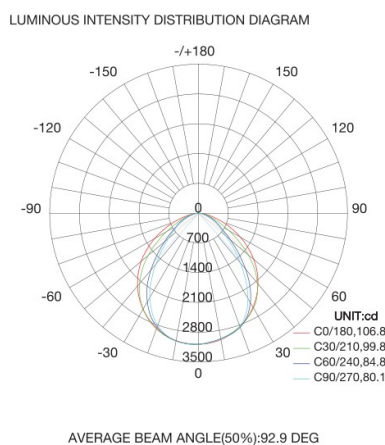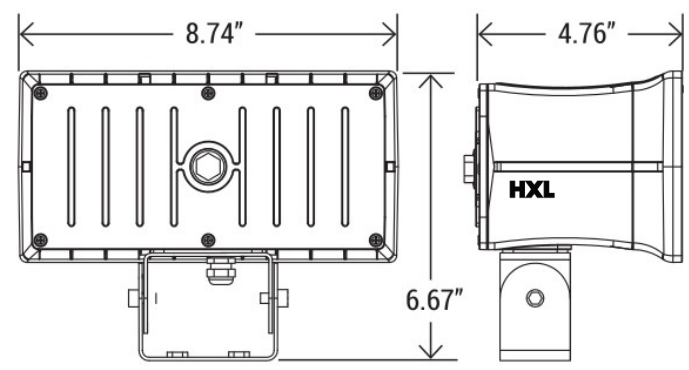

## CXMFL70

