

## Precision Reflector™ / Channel Strip

When fitted with **ecoHX X8 Touch-Safe** LED tubes these fixtures are the ideal lighting solution for:

- Manufacturing facilities
- Service centers
- Body shops
- Interior retail areas and markets
- Warehouses and storage units
- Shipping and receiving areas



EPR6LX896

## Features

- **Eco** – Earth-friendly design contains no mercury or lead.
- Heavy 22 gauge painted steel housing
- Pre-drilled for V-hangers, cable kit and surface mount
- Precision designed, multi-faceted **MIRO™** reflectors maximize photometric performance (95% reflectance).\*
- Pre-wired for line-voltage use (no ballast required)
- **IP20** socket design prevents accidental shock during tube replacement.
- Sockets are color-coded to insure proper polarity when used with **ecoHX X8 Touch-Safe** LED tubes.
- Luminaire disconnect provides ease of installation and improves safety.
- Available in multiple tube configurations
- Full-color wiring diagram provided

\* EPR models only



Product Code	Capacity	Watts	Replace	Description
EPR6LX896M	6 LX84 LED tubes	102W	Up to 400W HID	EcoHX/PRECISION-REFL/6-LX8/96-IN
EPR3LX848M	3 LX84 LED tubes	51W	Up to 175W HID	EcoHX/PRECISION-REFL/3-LX8/48-IN
ECS6LX896	6 LX84 LED tubes	102W	Up to 400 HID	EcoHX/CHANNEL-STRIP/6-LX8/96-IN
ECS3LX848	3 LX84 LED tubes	51W	Up to 175W HID	EcoHX/CHANNEL-STRIP/3-LX8/48-IN


## Accessories

Product Code	Description
HCORDW	15FT/3-WIRE CORD/PLUG/WHITE [120V ONLY]
G-VB-H-2	V-BRKT/HOOK/CABLE HANGER/15FT/100LB
VP3-BC-1	BAIL CLIP HANGER/VP3 (2-PACK)
SCC-2	SUSPENDED CEILING CLIPS (2-PACK)
SPC	PULL-CHAIN SWITCH WITH 4' CORD
LD2PI	LUMINAIRE DISCONNECT/PUSH-IN/18-12AWG
TSLX8-LR	TUBE SOCKET/LED/X8 [ LINE - RED ]
TSLX8-NG	TUBE SOCKET/LED/X8 [ NEUTRAL - GREEN ]

# Specifications

## EPR6LX896M / ECS6LX896


Length - 96"  
Width - 8.5" / 4.5"  
Height - 2" / 5.5"  
Capacity - 6, 4 or 2 48-inch tubes\*  
Wattage - 102W, 68W or 34W

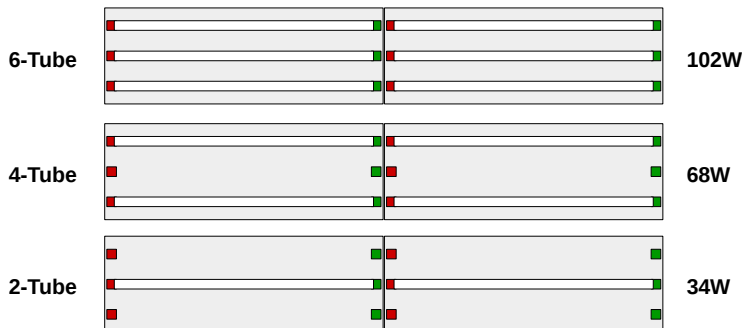

\* Use only HX Lighting X8™ Type B Touch-Safe Tubes.

## EPR3LX848M / ECS3LX848


Length - 48"  
Width - 8.5" / 4.5"  
Height - 2" / 5.5"  
Capacity - 3, 2 or 1 48-inch tubes\*  
Wattage - 51W, 34W or 17W

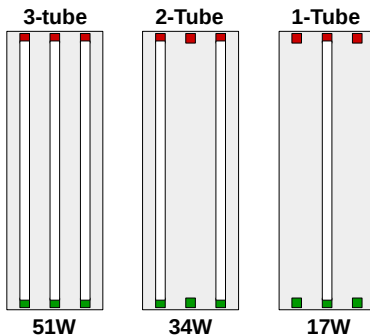

\* Use only HX Lighting X8™ Type B Touch-Safe Tubes.



# Mounting Options




Fixtures may also be mounted directly to horizontal or vertical surfaces using appropriate mounting hardware.

# Safety First Design

- Color-coded sockets
- UL approved for use in 120-277VAC applications
- No exposed conductors at tube socket
- IP20 rated against ingress of objects >12mm
- Tactile latching "click" to ensure proper tube alignment




- Copper alloy conductor
- Large pin contact area
- Secure wire connection
- Large wire contact area
- Rated for 600V / 660W



- Recessed wire sockets
- No exposed conductors at connection points
- Secure wire connection



- Quick disconnect
- No exposed conductors when disconnected
- Downstream fixture connection remains intact when local fixture is disconnected
- Recessed wire sockets
- No exposed conductors at connection points
- Easy connection of downstream parallel fixtures
- Approved for 120-277VAC applications



Through documentation is provided for every fixture configuration.

Full-color wiring diagrams are included with each fixture (fixtures are pre-wired).

Notification stickers are provided with each fixture to indicate that the fixture is direct wired for line voltage use (no ballast required).

