HXLIGHTING™

Covert-X™ Wallpack

ECOHX LED™

The ideal lighting solution for:

- Security lighting
- Accent and perimeter lighting
- Garages
- Entranceways
- Transport platforms / waiting areas

CXFWP50

CXVWP30

CXCWP70

Features

- **Eco** – Earth-friendly design contains no mercury or lead.
- Indoor/outdoor use (-22° F to 114° F)
- Wet location / IP66 rating
- Highest-efficiency **HX-POWR™ Driver** – Best In Class – 120-277V
- **CTC**™ (Custom Thermal Conductivity) die-cast aluminum housing
- Corrosion resistant powder-coat finish
- Anti-glare **Diamond Crystal**™ **Lens**
- Exceptional light quality - >80% CRI
- Outdoor color tone
- Extreme performance – 50,000+ user hours



Wattage	Replace HID	Product Code	Description	Color Tone	Photocell	Weight
30W	MH50 / MH175	**CXVWP30**	COVERT-X/VERTICAL/WALLPACK/30W	Outdoor	Included	3 lbs.
50W	MH175 / MH250	**CXFWP50**	COVERT-X/FULL/WALLPACK/50W	Outdoor	PC/PC2	4 lbs.
100W	MH250 / MH400	**CXFWP100**	COVERT-X/FULL/WALLPACK/100W	Outdoor	PC/PC2	7 lbs.
50W	MH175 / MH250	**CXCWP50**	COVERT-X/CUTOFF/WALLPACK/50W	Outdoor	PC/PC2	5 lbs.
70W	MH250 / MH400	**CXCWP70**	COVERT-X/CUTOFF/WALLPACK/70W	Outdoor	PC/PC2	7 lbs.
120W	MH400 / MH400+	**CXCWP120**	COVERT-X/CUTOFF/WALLPACK/120W	Outdoor	PC/PC2	9 lbs.

RoHS COMPLIANT

IP66

DLC QPL LISTED

UL

© 2022 HX Lighting, Inc. - 17 West Main Street - PO Box 149 – Dallastown, PA 17313 – 717-246-9500 – www.HXLightinginc.com

08/2022

Photometrics / Dimensions

30W Vertical Wallpack

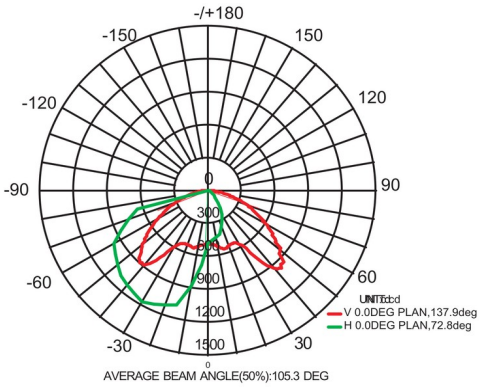

AVERAGE BEAM ANGLE(50%):105.3 DEG

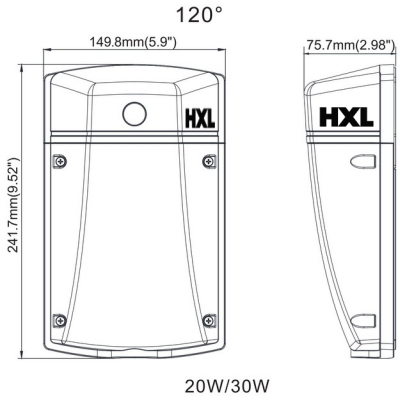

20W/30W

50W Full-Cuttoff Wallpack

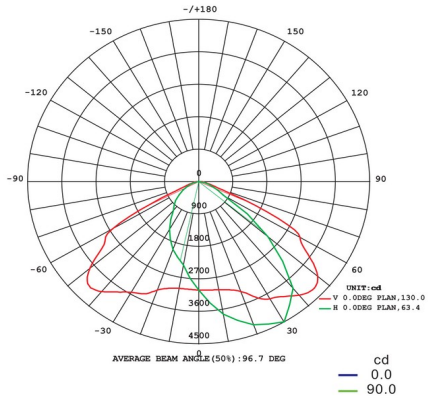

AVERAGE BEAM ANGLE(50%):96.7 DEG

cd
0.0
90.0

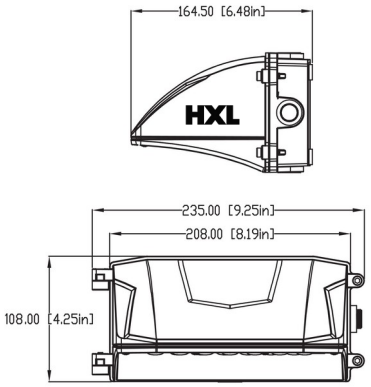

100W Full-Cuttoff Wallpack

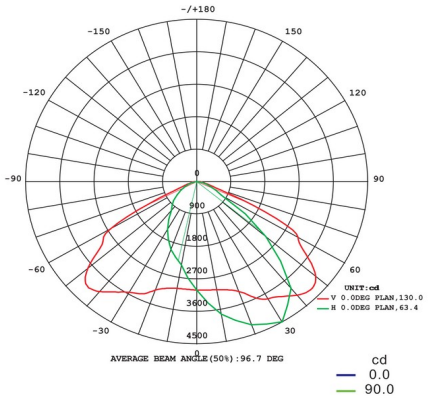

AVERAGE BEAM ANGLE(50%):96.7 DEG

cd
0.0
90.0

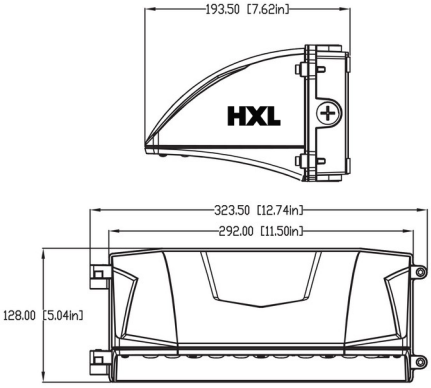

50W Cutoff Wallpack

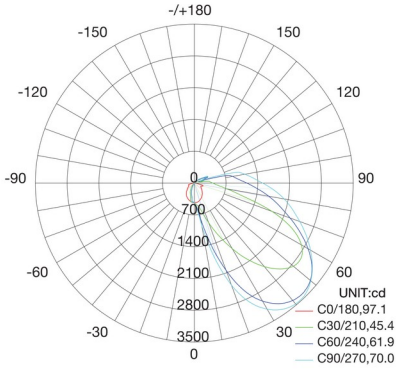

AVERAGE BEAM ANGLE(50%):68.6 DEG

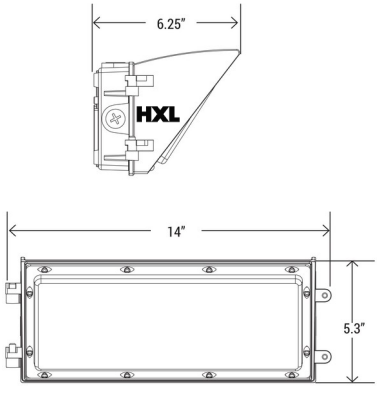

70W Cutoff Wallpack

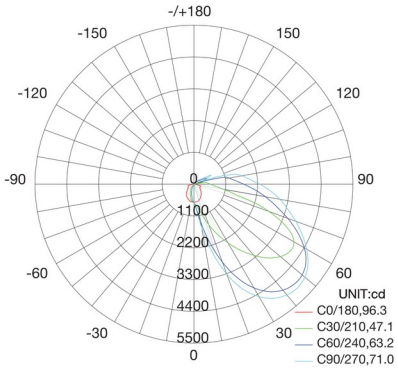

AVERAGE BEAM ANGLE(50%):69.4 DEG

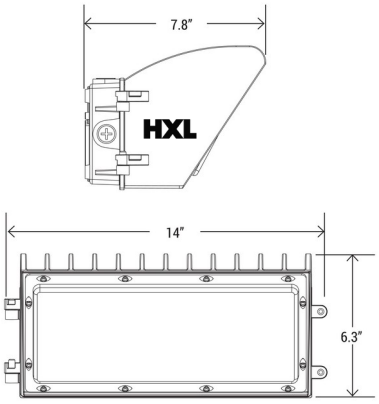

120W Cutoff Wallpack

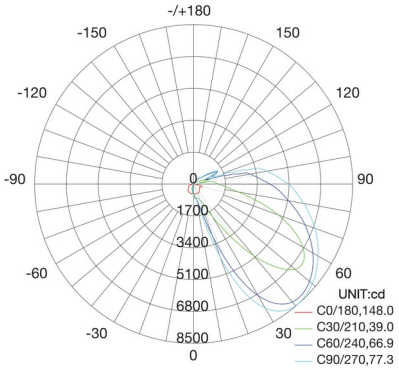

AVERAGE BEAM ANGLE(50%):82.8 DEG

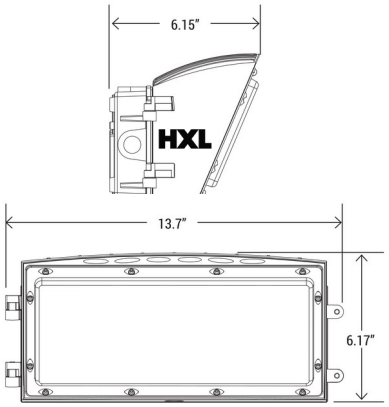

© 2022 HX Lighting, Inc. - 17 West Main Street - PO Box 149 – Dallastown, PA 17313 – 717-246-9500 – www.HXLightinginc.com