

HXL LIGHTING™

X8-ready Curve / Troffer / Wrap



When fitted with **HXL X8 Touch-Safe** tubes these fixtures are the ideal lighting solution for:

- Offices
- Schools
- Interior retail areas and markets
- Areas with drop ceilings or low ceilings
- Anywhere a low profile fixture is required



ECW3LX848



ECT3LX822
Direct-Indirect

Features

- **Eco** – Earth-friendly design contains no mercury or lead.
- Heavy 22 gauge painted steel housing
- Wraparound pre-drilled for surface mount / Troffers available to fit 15/16" inverted t-bar grids (2' x 2' or 2' x 4')
- Multi-faceted reflectors (retro-kits only).
- Pre-wired for line-voltage use (no ballast required)
- **IP20** socket design prevents accidental shock during tube replacement.
- Sockets are color-coded to insure proper polarity when used with **HXL X8 Touch-Safe** tubes.
- Luminaire disconnect provides ease of installation and improves safety.
- Available in multiple tube configurations
- Full-color wiring diagram provided



Watts	Capacity	Description	Product Code
51W	3-X8 4ft. tubes	EcoHX/CURVE-TROFFER/3-X8/2x4	ECT3LX824
51W	3-X8 4ft. tubes	EcoHX/TROFFER/3-X8/2x4	ELG3LX824
27W	3-X8 2ft. tubes	EcoHX/CURVE-TROFFER/3-X8/2x2	ECT3LX822
36W	4-X8 2ft. tubes	EcoHX/TROFFER/4-X8/2x2	ELG4LX822
51W	3-X8 4ft. tubes	EcoHX/CURVE-WRAP/3-X8/48-IN	ECW3LX848
51W	3-X8 4ft. tubes	EcoHX/WRAPAROUND/3-X8/48-IN	EWN3LX848
34W	2-X8 4ft. tubes	EcoHX/WRAPAROUND/2-X8/48-IN	EWN2LX848
18W	2-X8 2ft. tubes	EcoHX/WRAPAROUND/2-X8/24-IN	EWN2LX824


Accessories

Description	Product Code
FLAT PRISMATIC LENS/ACRYLIC/22-1/2 x 46-1/2 [MUST SPECIFY L" x W"]	H2X4
FLAT PRISMATIC LENS/ACRYLIC/23-3/4 x 47-3/4 [MUST SPECIFY L" x W"]	H2X4-T
SUSPENDED CEILING CLIPS (2-PACK)	SCC-2
PULL-CHAIN SWITCH WITH 4' CORD	SPC
LUMINAIRE DISCONNECT/PUSH-IN/18-12AWG	LD2PI
TUBE SOCKET/LED/X8 [LINE - RED]	TSLX8-LR
TUBE SOCKET/LED/X8 [NEUTRAL - GREEN]	TSLX8-NG
EMERGENCY-PACK/120-277 VOLT/1-TUBE	EPX8LV1

Specifications

ELG3LX824 (troffer) / EWN3LX848 (wraparound)

Length – 47.75" / 48"
 Width – 23.75" / 15.75"
 Height – 3.75" / 3.25"
 Capacity - 3, 2 or 1 HXL X8™ 48-inch tubes*
 Wattage - 51W, 34W or 17W

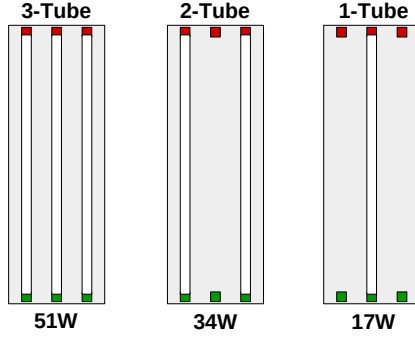


ELG3LX824

* Use only HX Lighting X8™ Type B Touch-Safe Tubes.

EWN2LX848 (wraparound)

Length – 48"
 Width – 9.125"
 Height – 3"
 Capacity - 2 HXL X8™ 48-inch tubes*
 Wattage - 34W

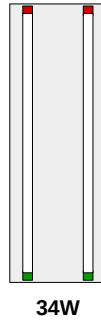


EWN2LX848

* Use only HX Lighting X8™ Type B Touch-Safe Tubes.

ELG4LX822 (troffer) / EWN2LX824 (wraparound)

Length – 23.75 / 24"
 Width – 23.75 / 9.125"
 Height – 3.75"
 Capacity - 4* or 2 HXL X8™ 24-inch tubes**
 Wattage – 36W, 18W, 18W

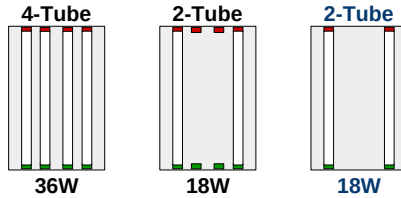


ELG4LX822

* 4-tube available in troffer only.

** Use only HX Lighting X8™ Type B Touch-Safe Tubes.

ECT3LX822 / ECT3LX824 (troffer)

Length – 24 / 48"
 Width – 24"
 Height – 3.26"
 Capacity - 3 HXL X8™ 24/48-inch tubes*
 Wattage – 27W, 51W




ECT3LX822

* Use only HX Lighting X8™ Type B Touch-Safe Tubes.

ECW3LX848 (curve-wrap)

Length – 48"
 Width – 9.957"
 Height – 3.478"
 Capacity - 3 HXL X8™ 48-inch tubes*
 Wattage – 51W

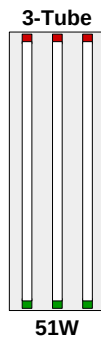

ECW3LX848

* Use only HX Lighting X8™ Type B Touch-Safe Tubes.