


Safe, high-efficiency replacements for fluorescent tubes in:

- Offices
- Showrooms
- Warehouses and storage facilities
- Retail locations
- Schools
- Refrigerated storage areas
- Outdoor/vapor-proof fixtures
- Anywhere T5 fluorescent tubes are used




Features

- Xtreme5 Line-voltage dual-end design – Type B
- Eliminates high-maintenance fluorescent ballasts
- Frosted glass tube will not sag or yellow - no pixelation - Excellent heat dissipation
- Exceptional light quality – 300 degree dispersion – Low glare
- Instant on at full brightness – no warm-up time
- High-Efficiency **HX DriverTM** - 120-277 volt
- Extreme Performance – 50,000+ User Hours
- Earth-friendly design contains no mercury or lead.
- Outdoor, Cool and Natural color tones




Watts	Length	Product Code	Description	Color Tone	CRI	Lumens	Case Qty.
24W	4ft.	LX54LV24O	LED/X5/4FT/120-277V/24W/Outdoor	Outdoor	85	3600	40
24W	4ft.	LX54LV24C	LED/X5/4FT/120-277V/24W/Cool	Cool	85	3600	40
24W	4ft.	LX54LV24N	LED/X5/4FT/120-277V/24W/Natural	Natural	85	3600	40
18W	3ft.	LX53LV18O	LED/X5/3FT/120-277V/18W/Outdoor	Outdoor	85	2700	40
18W	3ft.	LX53LV18C	LED/X5/3FT/120-277V/18W/Cool	Cool	85	2700	40
18W	3ft.	LX53LV18N	LED/X5/3FT/120-277V/18W/Natural	Natural	85	2700	40
12W	2ft.	LX52LV12O	LED/X5/2FT/120-277V/12W/Outdoor	Outdoor	85	1800	40
12W	2ft.	LX52LV12C	LED/X5/2FT/120-277V/12W/Cool	Cool	85	1800	40
12W	2ft.	LX52LV12N	LED/X5/2FT/120-277V/12W/Natural	Natural	85	1800	40

Accessories

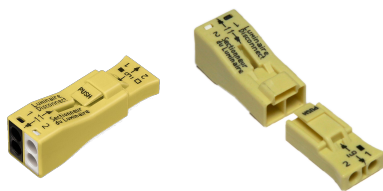

LD2PI



TSLX5-LR



TSLX5-NG

Product Code	Description
LD2PI	LUMINAIRE DISCONNECT/PUSH-IN/18-12AWG - (Order 1 per fixture)
TSLX5-LR	TUBE SOCKET/LED/X5 [LINE - RED] - (Order 1 per tube)
TSLX5-NG	TUBE SOCKET/LED/X5 [NEUTRAL - GREEN] - (Order 1 per tube)

Exclusive color-coded **Turn-N-Lock Tube Sockets** provide precise and accurate connectivity.

Order one **GREEN** and one **RED** socket per tube. Jumper wires are pre-installed on each socket.

Luminaire Disconnect allows for easy and safe fixture installation and service. Order one per fixture.